


SP-II 型阳图PS版 POSITIVE PS PLATE

SP-II型阳图PS版具有性能稳定,感度快,显影宽容度大,耐印率高等特点,自2006年上市以来,一直深受国内外客户的青睐。

With its features of stable performance,high sensitivity, wide developing tolerance and long run-length,SP-I positive PS plates has been in good grace of customers worldwide since the launch in 2006.

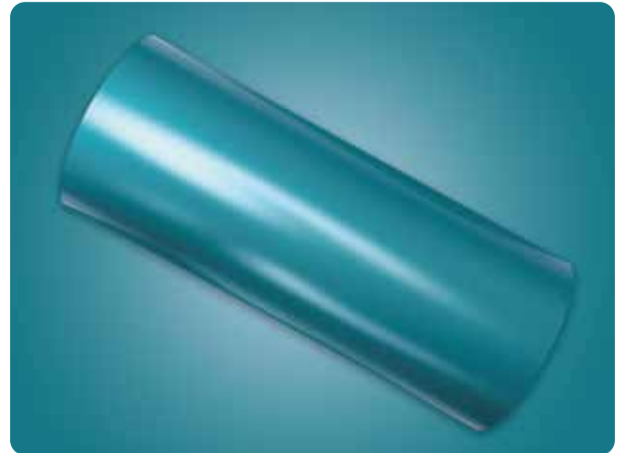

技术参数

SPECIFICATION

类型:阳图PS版	Type: Positive PS Plates
感光波长: 320~450nm	Spectral Sensitivity: 320~450nm
感光时间:30秒,约20个脉冲(3kw碘镓灯灯距1m UGRA PCW82 测控条三级不上墨) *曝光时间随显影条件和印品要求的不同而变化。	Exposure Duration:30 Secondsapprox20pulses(3kwIodine-Gallium lamp,from 1m,UGRA PCW82 control stripthe third section un-inking) *Duration varies with its printing conditions and materials.
分辨率: 200 lpi(2~98%)	Resolution: 200 lpi (2~98%)
安全灯:黄灯	Safelight: Yellow Light
显影时间:20-30秒 (强邦显影液:水=1:7,23±2°C)	Developing Time: 20~30 seconds (STRONG Solution: Water=1:7,23±2°C)
耐印率:5~10万(不烤版) 10~20万(烤版) *耐印率随印刷条件和成像内容的不同而有所变化。	Run-Length: 50,000~100,000 (Unbaked) 100,000~200,000(Baked) *Run-Length varies with its printing conditions and imaging content